



## How to Calibrate the Moisture Sensor on a 70 series Combine

Moisture Sensor needs to be calibrated once a year, preferably before you head to the field. If you are having issues with moisture then it is recommended to calibrate the moisture sensor as needed.


1. Press 4th button (Diagnostics and Calibration) on command center until you get to page 2/4.

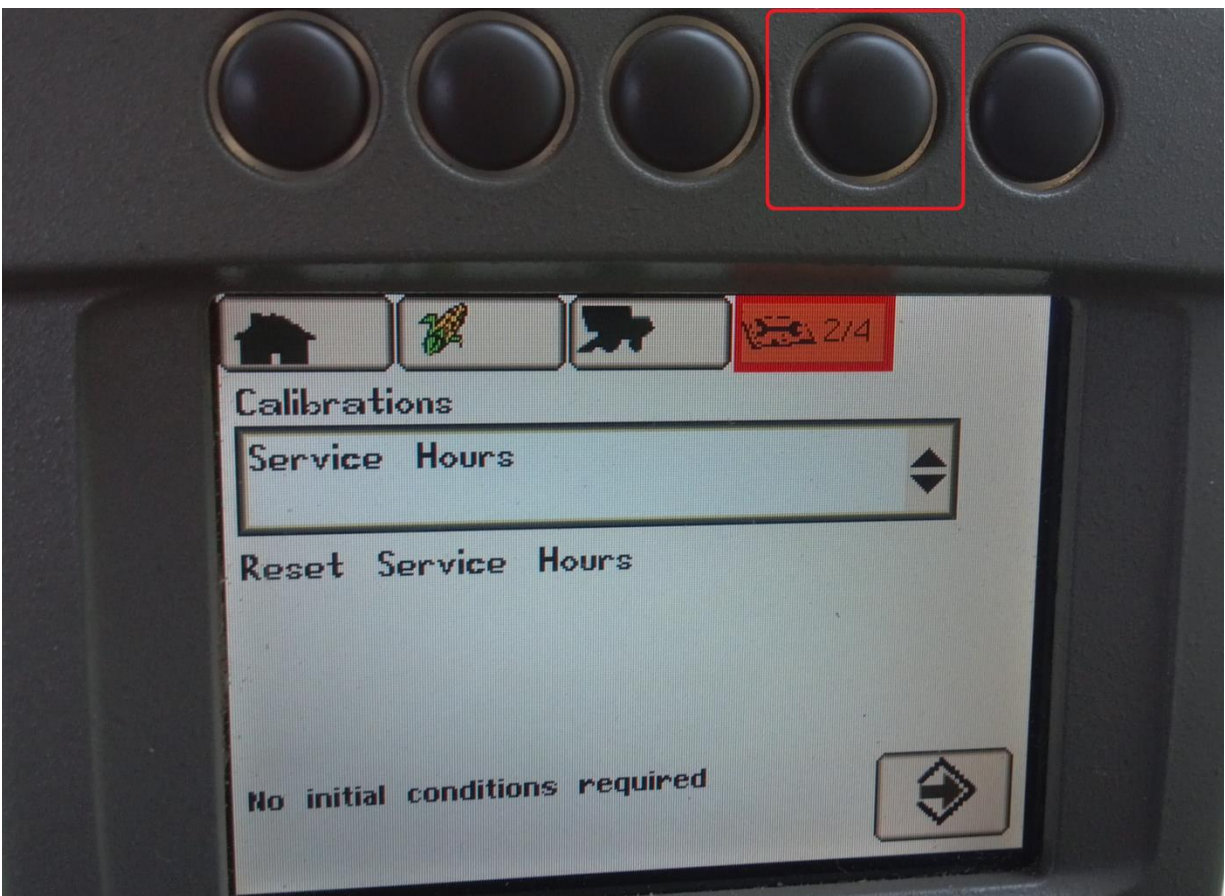


2. Use black thumb dial to highlight "Calibrations" box. Select "Moisture" from drop down box and press checkmark button.

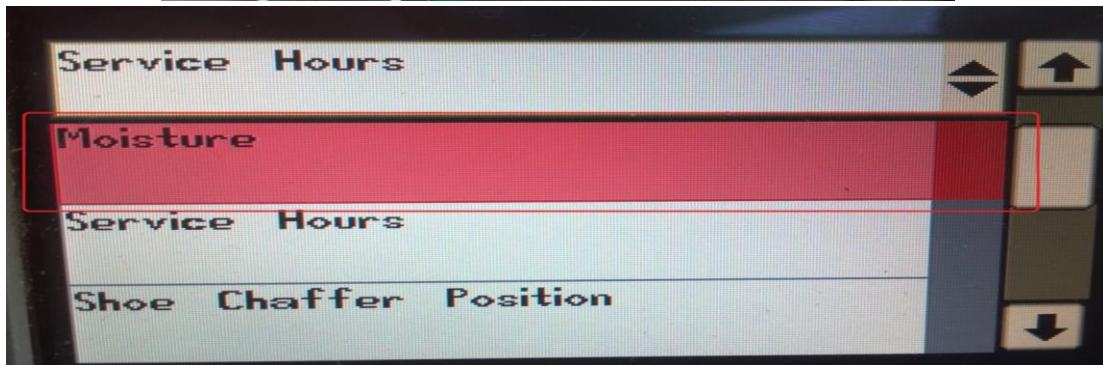


3. Use black thumb dial to highlight the green arrow and press checkmark button.

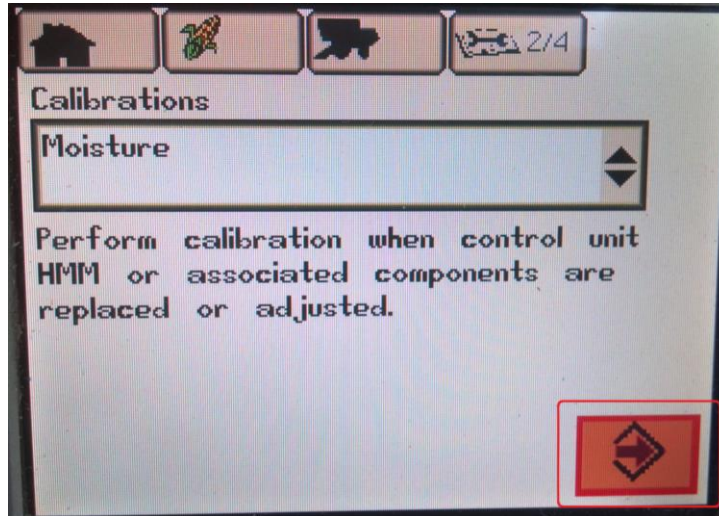


4. Make sure that grain tank is empty and engine is off! Use black thumb dial to highlight the white arrow and press checkmark button to go to next page.

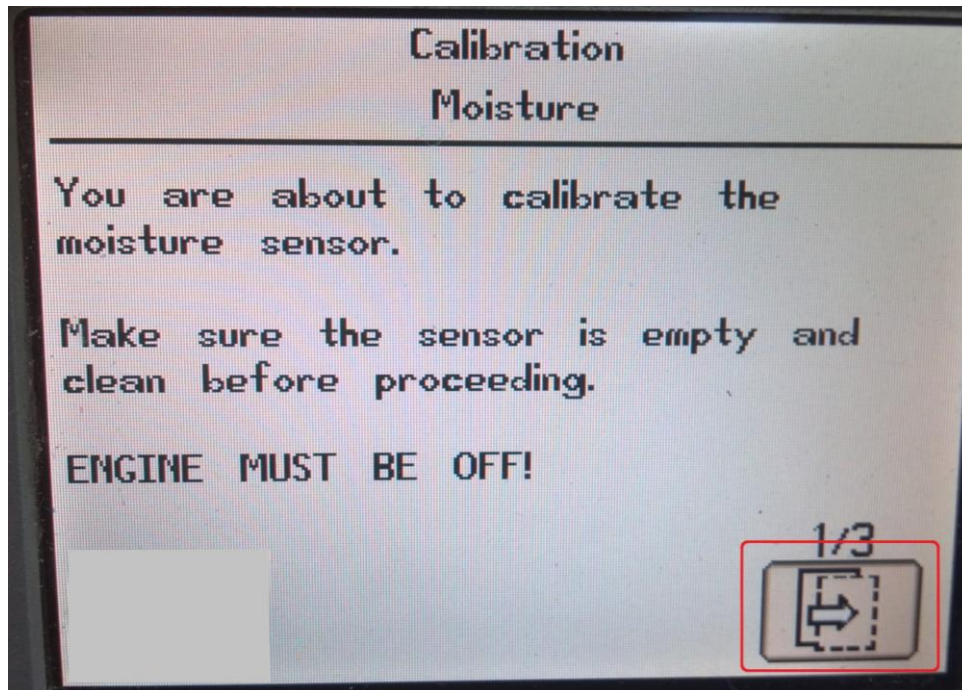

5. Moisture sensor is now calibrating.

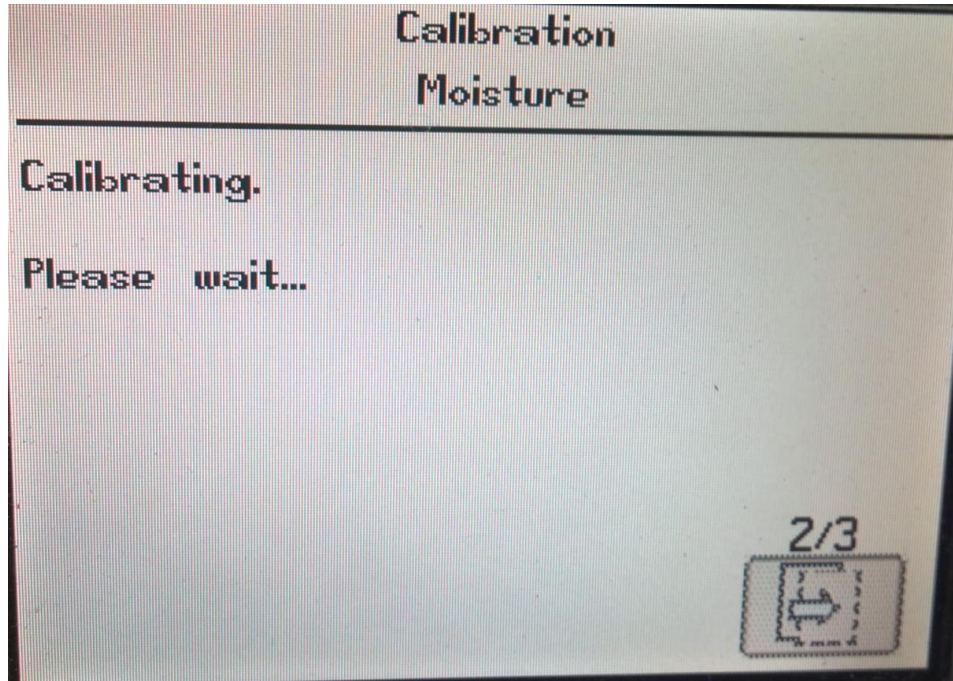

6. Once the calibration is complete press the checkmark button for accept.

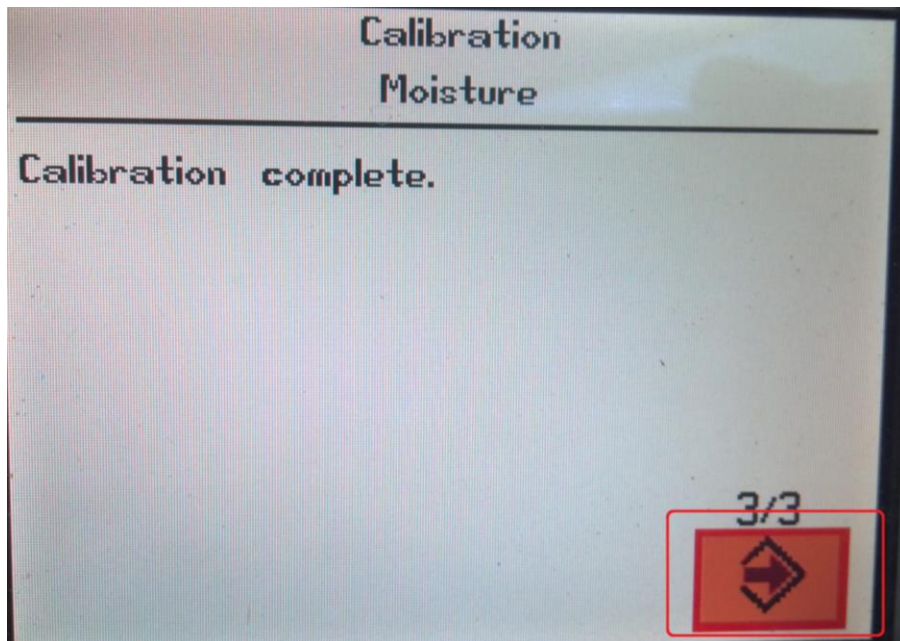

7. Press Home Button and start harvesting.

